


C A T A L O G U E

2 0 2 1

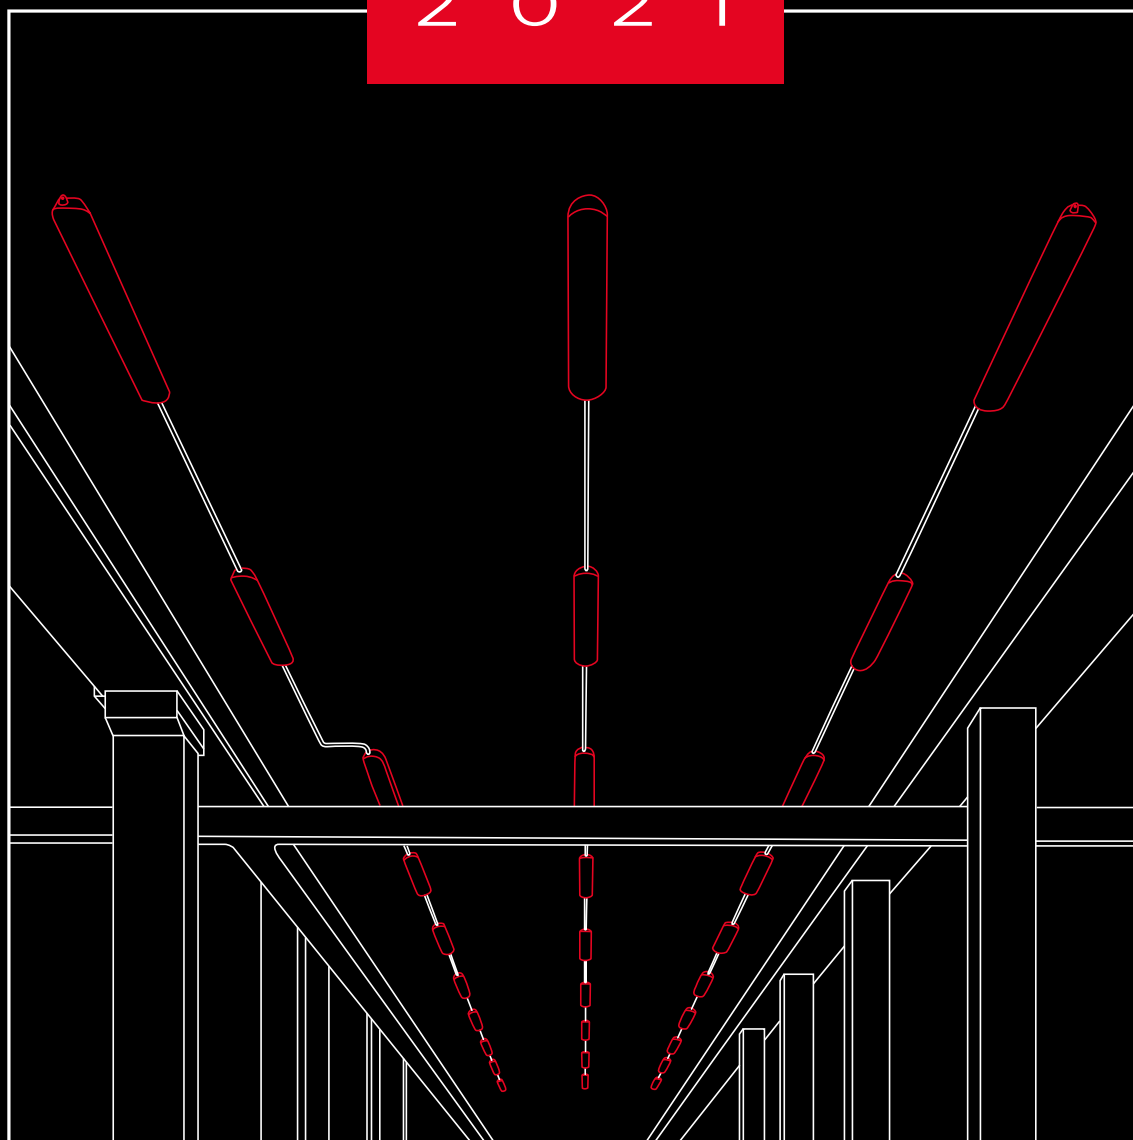


W W W . V Y R T Y C H . C O M

GALGO-LED

IP 65



IK10+120J



Application: Antivandal lighting fixture GALGO-LED with dust and water jets resistance is designed for areas with high risk of damage, i.e. prison cells, psychiatric hospitals, gyms and pedestrian subways.

Ballast: EP – electronic 220-240V /50-60Hz AC, 220-240V DC 0Hz

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet RAL 9003

Diffuser: Extremely resistant material PC (polycarbonate)

Fastening: Surface wall or ceiling mounting



Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm². The lighting fixture is prepared for loop-in (possibility of connection of two cables)

Standard equipment: 2 pcs cable gland, washers with rubber to seal mounting holes, safety screws (it is necessary to order additionally 004778 - Bit for safety screw with socket head and pin s=3)

Calculated lifetime – LED modules:

L80B10 ta30 – 70 000h


L70B10 ta30 – 100 000h

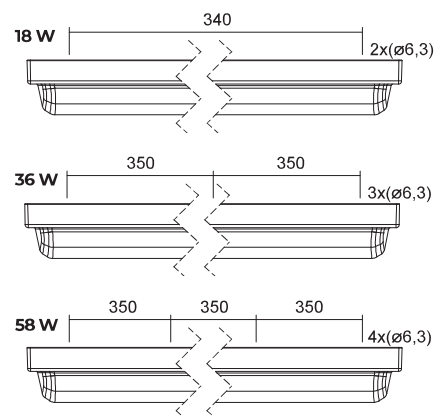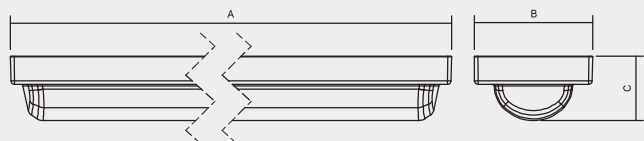

Order number	Name	Lighting fixture luminous flux(lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Weight (kg)
051770	GALGO-LED-1250-118-4K	1110	8	139	40	690x194x108	6,3
051771	GALGO-LED-2500-218-4K	2220	16	139	40	690x194x108	5,5
051772	GALGO-LED-5000-218-4K	4650	33	141	40	690x194x108	6,3
051773	GALGO-LED-2500-136-4K	2271	17	134	60	1300x194x108	11
051774	GALGO-LED-5000-236-4K	4542	33	138	60	1300x194x108	11
051775	GALGO-LED-10000-236-4K	9300	66	141	40	1300x194x108	11
051776	GALGO-LED-3750-158-4K	3406	25	136	50	1600x194x108	13
051777	GALGO-LED-7500-258-4K	6813	50	136	50	1600x194x108	13
051778	GALGO-LED-12550-258-4K	11639	80	145	40	1600x194x108	13

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

GALGO-LED



Order number	Name	Lighting fixture luminous flux(lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Weight (kg)
051770 FF	GALGO-LED-FF-1250-118-4K	1110	8	139	40	696x194x108	6,5
051771 FF	GALGO-LED-FF-2500-218-4K	2220	16	139	40	696x194x108	5,2
051772 FF	GALGO-LED-FF-5000-218-4K	4650	33	141	40	696x194x108	6,5
051773 FF	GALGO-LED-FF-2500-136-4K	2271	17	134	60	1306x194x108	11,2
051774 FF	GALGO-LED-FF-5000-236-4K	4542	33	138	60	1306x194x108	11,2
051775 FF	GALGO-LED-FF-10000-236-4K	9300	66	141	40	1306x194x108	11,2
051776 FF	GALGO-LED-FF-3750-158-4K	3406	25	136	50	1606x194x108	13,2
051777 FF	GALGO-LED-FF-7500-258-4K	6813	50	136	50	1606x194x108	13,2
051778 FF	GALGO-LED-FF-12550-258-4K	11639	80	145	40	1606x194x108	13,2


FF (full frame)

VYRTYCH antivandal luminaires with FF marking comply with ANTI LIGATURE or SUICIDE RESISTANT requirements for areas with high risk of damage like prison or a secure healthcare facility. There are generally no moving or protruding parts or rounded, bevelled corners also prevent points, where something can be attached. This means there are no ligature points or attachment areas that could enable a luminaire to be used for self-harming.



GALGO-LED-FF

This type of luminaire is equipped with a diffuser with a complete sheet metal frame.



GALGO-LED

This type of luminaire is equipped with a diffuser, which is complemented on the long sides by a reinforcing sheet metal rim.

On request

Em – non-maintained emergency lighting (1h, 3h)

DIM – dimmable electronic ballast (DSI, DALI)

2.7K-6.5K – colour temperature

MULTI – maintained emergency lighting (1h, 3h)

NANO – lighting fixtures can be protected by special nano-layer (hydrophobic, oleophobic or antibacterial protection)

RAL – other colour scale

MW SENSOR - microwave sensor (if a sensor is required, contact technical support)

NEREZ - housing produced from stainless steel AISI 304 or AISI 316

(in case of STAINLESS STEEL version its declared for ambient

temperature decreased about 5-10°C)

NIGHT LIGHT - equipped with 4-8W LED source for night-time lighting

Stadard order number	EM-1H	EM-3H	MULTI-1H	MULTI-3H	DALI	1F	3F
051770	X	X	051790	X	051770 DALI	X	X
051771	X	X	051780	X	051771 DALI	X	X
051772	X	X	X	X	051772 DALI	X	X
051773	X	X	051791	051793	051773 DALI	X	X
051774	X	X	051781	051784	051774 DALI	X	X
051775	X	X	X	X	051775 DALI	X	X
051776	X	X	051792	051794	051776 DALI	X	X
051777	X	X	051782	051785	051777 DALI	X	X
051778	X	X	X	X	051778 DALI	X	X

Stadard order number	FF
051770	051770 FF
051771	051771 FF
051772	051772 FF
051773	051773 FF
051774	051774 FF
051775	051775 FF
051776	051776 FF
051777	051777 FF
051778	051778 FF

STAFORD-LED

IP 65



IK10



Application: Recessed antivandal lighting fixture STAFORD-LED with resistance against dust and with splash water resistance is designed for areas with high risk of damage, such as prison cells, psychiatric hospitals, underpasses, tunnels, underground stations and railway station platforms.

Ballast: EP – electronic 220-240 V / 50-60 Hz AC , 220-240V DC 0Hz

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet RAL 9003

Diffuser: Combination of painted sheet RAL 9003 and opal polycarbonate diffuser

Reflector: White painted steel sheet RAL 9003

Fastening: Recessed ceiling mounting


Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm²

Standard equipment: 2 pcs cable gland, washers with rubber to seal mounting holes, safety screws (it is necessary to order additionally 004778 - Bit for safety screw with socket head and pin s=3)

Calculated lifetime – LED modules:

L80B10 ta30 – 70 000h


L70B10 ta30 – 100 000h

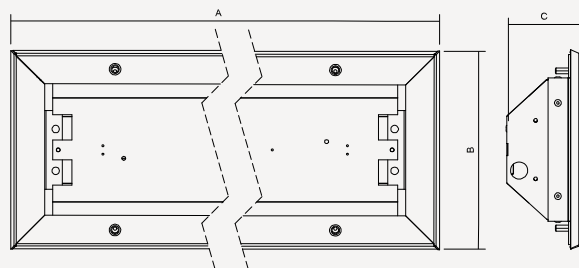

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting hole (mm)	Weight (kg)
057690	STAFORD-LED-OP-3500-4K	2562	21	122	30	653x255x95	605x200	6
057691	STAFORD-LED-OP-4650-4K	3368	29	116	30	653x255x95	605x200	6
057692	STAFORD-LED-OP-5350-4K	3890	34	114	30	653x255x95	605x200	6
057693	STAFORD-LED-OP-7000-4K	5052	43	117	30	953x255x95	905x200	10
057694	STAFORD-LED-OP-8000-4K	5838	51	114	30	953x255x95	905x200	10
057695	STAFORD-LED-OP-9300-4K	6736	58	116	30	1253x255x95	1205x200	14
057696	STAFORD-LED-OP-10650-4K	7781	68	114	30	1253x255x95	1205x200	14

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

STAFORD-LED



Accessories on request



002022	STAFORD installation box L=1 253 mm
002025	STAFORD installation box L= 953 mm
002026	STAFORD installation box L= 653 mm

note: only in case of concrete base / concrete niche

Lighting fixture detail



On request

Em – non-maintained emergency lighting (1h, 3h)

DIM – dimmable electronic ballast (DSI, DALI)

2.7K-6.5K – colour temperature

NANO – lighting fixtures can be protected by special nano-layer (hydrophobic, oleophobic or antibacterial protection)

GLASS – hardened safety glass

MW SENSOR - microwave sensor (in case of requirement for a sensor, contact the technical support)

MULTI – maintained emergency lighting (1h, 3h)

RAL – other colour scale

1/3 F – single-phase or three phase through wiring connection, maximum diameter of wires 2.5 mm²

NEREZ - housing produced from stainless steel AISI 304 or AISI 316

(in case of STAINLESS STEEL version its declared for ambient temperature decreased about 5-10°C)


NIGHT LIGHT - equipped with 4-8W LED source for night-time lighting 3K or 4K

II - insulation class II

Standard order number	EM-1H	EM-3H	MULTI-1H	MULTI-3H	DALI	1F	3F
057690	X	X	X	X	057690 DALI	X	X
057691	X	X	X	X	057691 DALI	X	X
057692	X	X	X	X	057692 DALI	X	X
057693	X	X	057693 1H	057693 3H	057693 DALI	X	X
057694	X	X	057694 1H	057694 3H	057694 DALI	X	X
057695	X	X	057695 1H	057695 3H	057695 DALI	X	X
057696	X	X	057696 1H	057696 3H	057696 DALI	X	X

RAMBO-LED-FL

IP 66 / IP 67, IP 42



Application: Dustproof antivandal lighting fixture RAMBO-LED with splash water resistance is designed for areas with high risk of damage, such as prison cells, psychiatric hospitals, underpasses, tunnels, underground stations and railway station platforms.

Ballast: EP – electronic 220-240 V / 50-60 Hz AC, 220-240V DC 0Hz

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet (RAL 9003) equipped with plastic end caps (polycarbonate)

Diffuser: Tube of 70 mm external diameter and 4 mm wall thickness made of opal polycarbonate, equipped with sealing plugs in case of IP66/IP67 version

Fastening: Surface wall or ceiling mounting


Connection: Screw connector terminal block, maximum diameter of wires 2.5 mm²

Standard equipment: 2 pcs cable gland, washers with rubber to seal mounting holes, safety screws (it is necessary to order additionally 002020 RAMBO special key for safety screws)

Calculated lifetime – LED modules:

L80B10 ta30 – 70 000h


L70B10 ta30 – 100 000h

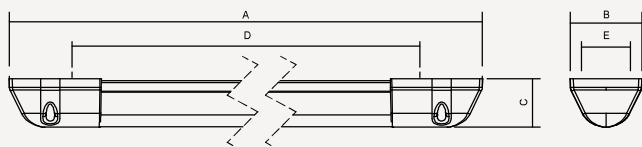

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting spacing Dx E (mm)	Weight (kg)
IP66/IP67								
084085	RAMBO-LED-FL-2500-4K, l=955 mm	1929	17	113	30	955x112x76	779x60 (Ø8)	5,3
084086	RAMBO-LED-FL-5000-4K, l= 1445 mm	3858	33	117	30	1445x112x76	1276x60 (Ø8)	7,5
084087	RAMBO-LED-FL-7500-4K, l= 1910 mm	5787	50	116	30	1910x112x76	1742x60 (Ø8)	8,8
IP42								
084220	RAMBO-LED-FL-2500-4K, l=955 mm	1929	17	113	30	955x112x76	779x60 (Ø8)	5,3
084221	RAMBO-LED-FL-5000-4K, l= 1445 mm	3858	33	117	30	1445x112x76	1276x60 (Ø8)	7,5
084222	RAMBO-LED-FL-7500-4K, l= 1910 mm	5787	50	116	30	1910x112x76	1742x60 (Ø8)	8,8

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

RAMBO-LED-FL




Accessories on request



004569 Screw with special head



002020 Spanner for mounting and dismantling special screw



order
number
on
request
Corner bracket 30°

Lighting fixture detail



On request

Em – non-maintained emergency lighting (1h, 3h)

DIM – dimmable electronic ballast (DSI, DALI)

2.7K-6.5K – colour temperature

NANO – lighting fixtures can be protected by special nano-layer (hydrophobic, oleophobic or antibacterial protection)

MW SENSOR - microwave sensor (in case of requirement for sensor contact the technical support)

MULTI – maintained emergency lighting (1h, 3h)

RAL – other colour scale

1/3 F – single-phase or three phase through wiring connection, maximum diameter of wires 2.5 mm²

NEREZ - housing produced from stainless steel AISI 304 or AISI 316

(in case of STAINLESS STEEL version its declared for ambient temperature decreased about -5-10°C)

Standard order number	EM-1,5H	EM-3H	MULTI-1,5H	MULTI-3H	DALI	1F	3F
IP66/IP67							
084085	X	X	084060	084063	084066	084085 1F	084085 3F
084086	X	X	084061	084064	084067	084086 1F	084086 3F
084087	X	X	084062	084065	084068	084087 1F	084087 3F
IP42							
084220	X	X	084223	084226	084229	084220 1F	084220 3F
084221	X	X	084224	084227	084230	084221 1F	084221 3F
084222	X	X	084225	084228	084231	084222 1F	084222 3F

BOXER-LED

IP 65



Application: Antivandal lighting fixture BOXER-LED with dust and splash water resistance is designed for areas with high risk of damage, i.e. prison cells, psychiatric hospitals, gyms and pedestrian subways.

Ballast: EP – electronic 220-240 V/50-60 Hz AC, 220-240 V

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet RAL 9003

Diffuser: Polycarbonate in combination with painted steel frame RAL9003



Reflector: Highly polished aluminium sheet

Fastening: Surface wall or ceiling mounting, recessed via frame for recessed installation or corner mounted via set for corner installation

Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm². The lighting fixture is prepared for loop-in (possibility of connection of two cables)

Standard equipment: 2 pcs cable gland, washers with rubber to seal mounting holes, safety screws (it is necessary to order additionally 004778 - Bit for safety screw with socket head and pin s=3)


Calculated lifetime – LED modules:
L80B10 ta30 – 70 000h
L70B10 ta30 – 100 000h

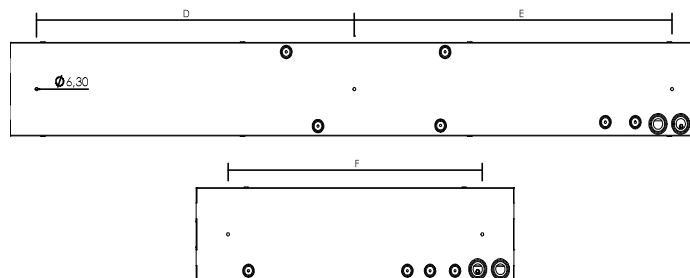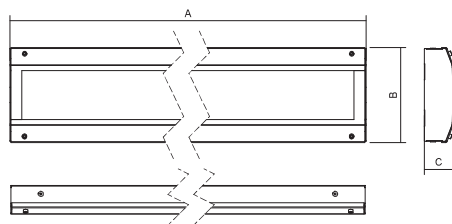

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting spacing Dx E/ F (mm)	Weight (kg)
053495	BOXER-LED-1450-4K	1123	8	140	55	421x184x56	320	2,8
053489	BOXER-LED-1650-4K	1413	11	128	55	421x184x56	320	2,8
053494	BOXER-LED-2900-4K	2393	18	133	60	701x184x56	540	4,7
053491	BOXER-LED-3300-4K	2826	22	128	60	701x184x56	540	4,7
053497	BOXER-LED-5800-4K	4786	36	133	55	1257x184x56	550x550	7
053487	BOXER-LED-6600-4K	5368	41	131	55	1257x184x56	550x550	7
053499	BOXER-LED-7200-4K	6350	48	132	45	1519x184x56	680x680	9
053485	BOXER-LED-8200-4K	6710	51	132	45	1519x184x56	680x680	9

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

BOXER-LED



Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting spacing Dx E/F (mm)	Weight (kg)
053495 FC	BOXER-LED-FC-1450-4K	1123	8	140	55	426x186x56	320	3
053489 FC	BOXER-LED-FC-1650-4K	1413	11	128	55	426x186x56	320	3
053494 FC	BOXER-LED-FC-2900-4K	2393	18	133	60	706x186x56	540	5
053491 FC	BOXER-LED-FC-3300-4K	2826	22	128	60	706x186x56	540	5
053497 FC	BOXER-LED-FC-5800-4K	4786	36	133	55	1262x186x56	550x550	7,3
053487 FC	BOXER-LED-FC-6600-4K	5368	41	131	55	1262x186x56	550x550	7,3
053499 FC	BOXER-LED-FC-7200-4K	6350	48	132	45	1524x186x56	680x680	9,5
053485 FC	BOXER-LED-FC-8200-4K	6710	51	132	45	1524x186x56	680x680	9,5

FC (full cover)

VYRTYCH antivandal luminaires with FC marking comply with ANTI LIGATURE or SUICIDE RESISTANT requirements for areas with high risk of damage like prison or a secure healthcare facility. There are generally no moving or protruding parts or rounded, bevelled corners also prevent points, where something can be attached. This means there are no ligature points or attachment areas that could enable a luminaire to be used for self-harming.



BOXER-LED-FC

The luminaire of this type is equipped with a frame that completely covers the luminaire body. The impact resistance of this solution is 50J.



BOXER-LED

The luminaire of this type is equipped with a frame that covers the luminaire body by 10 mm. The impact resistance of this solution is 40J.

Accessories on request



053416	Set for corner installation BOXER-LED 10W, 13W (420 mm) Not suitable for BOXER-LED-FC
053417	Set for corner installation BOXER-LED 21W, 25W (700 mm) Not suitable for BOXER-LED-FC
053418	Set for corner installation BOXER-LED 42W, 50W (1257 mm) Not suitable for BOXER-LED-FC
053419	Set for corner installation BOXER-LED 43W, 63W (1537 mm) Not suitable for BOXER-LED-FC

On request

Em – non-maintained emergency lighting (1h, 3h)

DIM – dimmable electronic ballast (DSI, DALI)

2.7K-6.5K – colour temperature

NEREZ - housing produced from stainless steel AISI 304 or AISI 316

(in case of STAINLESS STEEL version its declared for ambient temperature decreased about: 5-10°C)

MW SENSOR - microwave sensor (in case of requirement for sensor, contact the technical support)

MULTI – maintained emergency lighting (1h, 3h)

RAL – other colour scale

NANO – lighting fixtures can be protected by special nano-layer (hydrophobic, oleophobic or antibacterial protection)

NIGHT LIGHT - equipped with 4-8W LED source for night-time lighting

SKLO – hardened safety glass

Standard order number	MULTI-1,5H	MULTI-3H	DALI	1F	3F
053495	053495 1H	053495 3H	053495 DALI	X	X
053489	053489 1H	053489 3H	053489 DALI	X	X
053494	053494 1H	053494 3H	053494 DALI	X	X
053491	053491 1H	053491 3H	053491 DALI	X	X
053497	053497 1H	053497 3H	053497 DALI	X	X
053487	053487 1H	053487 3H	053487 DALI	X	X
053499	053499 1H	053499 3H	053499 DALI	X	X
053485	053485 1H	053485 3H	053485 DALI	X	X


Standard order number	MULTI-1,5H	MULTI-3H	DALI	1F	3F
053495 FC	053495 FC 1H	053495 FC 3H	053495 FC DALI	X	X
053489 FC	053489 FC 1H	053489 FC 3H	053489 FC DALI	X	X
053494 FC	053494 FC 1H	053494 FC 3H	053494 FC DALI	X	X
053491 FC	053491 FC 1H	053491 FC 3H	053491 FC DALI	X	X
053497 FC	053497 FC 1H	053497 FC 3H	053497 FC DALI	X	X
053487 FC	053487 FC 1H	053487 FC 3H	053487 FC DALI	X	X
053499 FC	053499 FC 1H	053499 FC 3H	053499 FC DALI	X	X
053485 FC	053485 FC 1H	053485 FC 3H	053485 FC DALI	X	X

CLUMBER-LED

IP 64



IK10



Application: Antivandal lighting fixture CLUMBER-LED with dust and splash water resistance is designed for areas with high risk of damage, i.e. prison cells, psychiatric hospitals, gyms and pedestrian subways.

Ballast: EP – electronic 220-240 V / 50-60 Hz AC, 220-240 V DC 0Hz

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet RAL 9003

Diffuser: Combination of painted sheet RAL 9003 and opal polycarbonate diffuser


Reflector: Highly polished aluminium sheet

Fastening: Surface wall or ceiling mounting

Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm². The lighting fixture is prepared for loop-in (possibility of connection of two cables)


Standard equipment: 2 pcs cable gland, washers with rubber to seal mounting holes, safety screws (it is necessary to order additionally 004778 - Bit for safety screw with socket head and pin s=3)

Calculated lifetime – LED modules: L80B10 ta30 – 70 000h
L70B10 ta30 – 100 000h

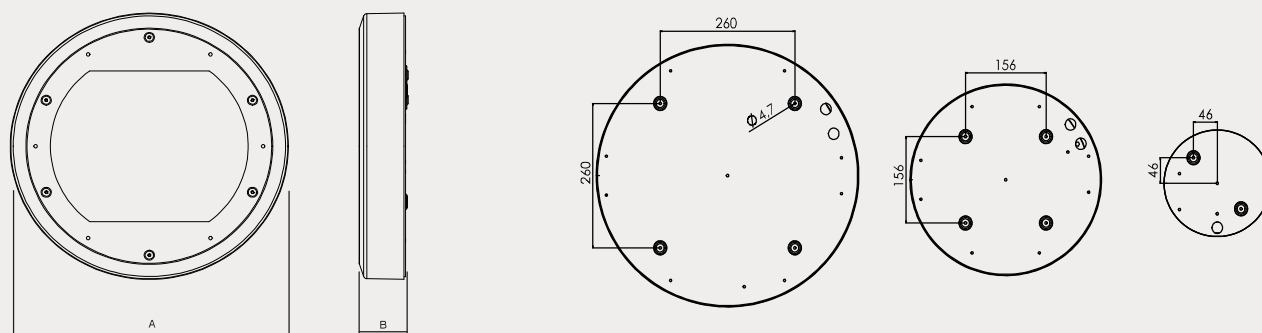

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B (mm)	Weight (kg)
053550	CLUMBER1-LED-OP-4500-4K	3276	29	113	30	505x63	7,5
053551	CLUMBER1-LED-OP-3900-4K	2842	25	114	30	505x63	7,5
053552	CLUMBER1-LED-OP-5100-4K	3693	34	109	30	505x63	7,5
053553	CLUMBER1-LED-OP-6200-4K	4472	43	104	30	505x63	7,5
053554	CLUMBER2-LED-OP-1950-4K	1404	13	108	30	370x63	4,2
053555	CLUMBER2-LED-OP-1700-4K	1218	11	111	30	370x63	4,2
053556	CLUMBER2-LED-OP-2200-4K	1582	14	113	30	370x63	4,2
053557	CLUMBER2-LED-OP-2650-4K	1916	18	106	30	370x63	4,2
053558	CLUMBER3-LED-OP-1150-4K	959	8	120	30	208x66	1,8
053559	CLUMBER3-LED-OP-1500-4K	1225	12	102	30	208x66	1,8

Tolerance of luminous flux and power input of the lighting fixture +/- 10%



Lighting fixture detail



On request

Em – non-maintained emergency lighting (1h, 3h)

DIM – dimmable electronic ballast (DSI, DALI)

NANO – lighting fixtures can be protected by special nano-layer (hydrophobic, oleophobic or antibacterial protection)

MULTI – maintained emergency lighting (1h, 3h)

RAL – other colour scale

2.7K-6.5K – colour temperature

Standard order number	MULTI-1,5H	MULTI-3H	DALI	1F	3F
053550	053550 1H	053550 3H	053550 DALI	X	X
053551	053551 1H	053551 3H	053551 DALI	X	X
053552	053552 1H	053552 3H	053552 DALI	X	X
053553	053553 1H	053553 3H	053553 DALI	X	X
053554	053554 1H	X	053554 DALI	X	X
053555	053555 1H	X	053555 DALI	X	X
053556	053556 1H	X	053556 DALI	X	X
053557	053557 1H	X	053557 DALI	X	X
053558	X	X	053558 DALI	X	X
053559	X	X	053559 DALI	X	X