



Control console
P. 89



Plinths
P. 92



Ventilation kit IP55
P. 117





Standard operating

AS with solid door, welded side panels, screwed rear wall, depth-adjustable internal mounting plate, without plinth.

Category of protection and certification	 IP66 IK10	EN 60 529/09.2000 EN 50 102/05.96
	 TYPE 4x 12, 1, 4 NEMA 4x 12, 1, 4	Standard 508 Standard 250
	 EN 62208 : 2003	89/392/EEC
Thickness	Cabinet body 1,5 mm, door 1,5 mm.	
Material	AISI 304 Wnr. 1.4301 brushed fine scotch brite medium	
Internal mounting plate	2,5 mm FeZn, adjustable	
on request	Manufacturing in AISI 316 Wnr. 1.4404	

AISI 304 stainless steel compact cabinets with solid door, welded side panels and screwed rear wall, equipped with FeZn depth-adjustable internal mounting plate. Bottom with separate cable inlet plate and lifting eyebolts. The models L=1200 mm have two overlapping doors L=600 mm without central post.

IRINOX

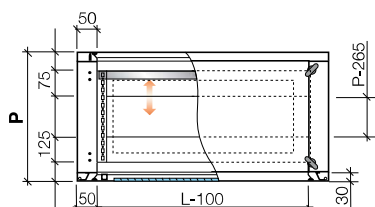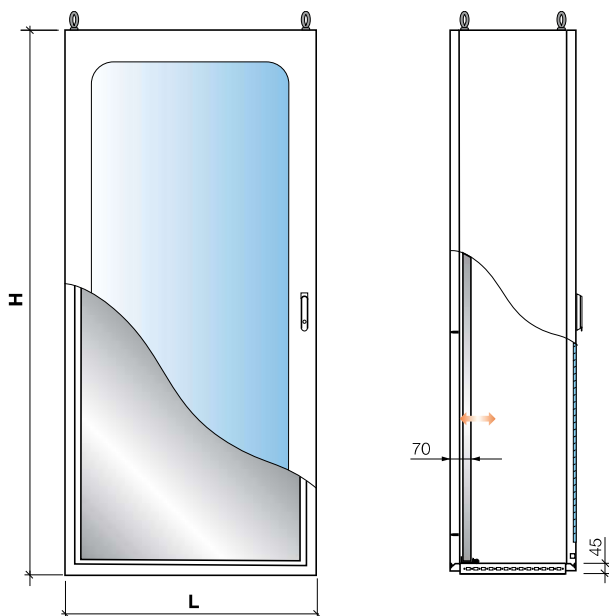

Internal mounting plate: L -100 mm H -115 mm

Useful surface (door): L -140 mm H -140 mm

Useful Depth: P -72 mm

Door opening: 120°

Lexan Window-door: L -225 mm H -200 mm

Order code	Model	Nr. door	External dimensions mm			kg	m³
			L	H	P		
013220015	AV 60 180 40	1	600	1800	400	103	0,50
013220025	AV 80 180 40	1	800	1800	400	130	0,67
013220045	AV 100 180 40	1	1000	1800	400	140	0,83
013220065	AV 120 180 40	2*	1200	1800	400	171	1,00
013220085	AV 60 200 40	1	600	2000	400	112	0,55
013220105	AV 80 200 40	1	800	2000	400	135	0,73
013220125	AV 100 200 40	1	1000	2000	400	140	0,92
013220145	AV 120 200 40	2*	1200	2000	400	165	1,10
013220165	AV 60 180 60	1	600	1800	600	138	0,75
013220185	AV 80 180 60	1	800	1800	600	146	0,99
013220205	AV 100 180 60	1	1000	1800	600	165	1,24
013220225	AV 120 180 60	2*	1200	1800	600	198	1,48
013220245	AV 60 200 60	1	600	2000	600	140	0,82
013220265	AV 80 200 60	1	800	2000	600	160	1,09
013220285	AV 100 200 60	1	1000	2000	600	198	1,36
013220305	AV 120 200 60	2*	1200	2000	600	237	1,63

* 2 overlapping doors without central post (the right door closes the left slave door).

All data can undergo changes without notice.